

THREADED STUD SW-702


When your application requires a simple threaded assembly, the TUF-GRIP SW-702 Threaded Stud is the most economical choice.

You can depend on the tolerances with this assembly. The standard stud material is carbon steel, but stainless steel and higher strength steels are also available. We furnish the studs without wrench flats unless specified on the order, as discussed above.

When measuring the thread length, use the minimum dimensions to make use of existing qualified designs. Thread length may be increased if desired. The standard thread used is Right Hand National Coarse Class 2A, but other threads are available on request.

Please specify the L_s , L_t and D .

Custom designs with different fitting lengths and

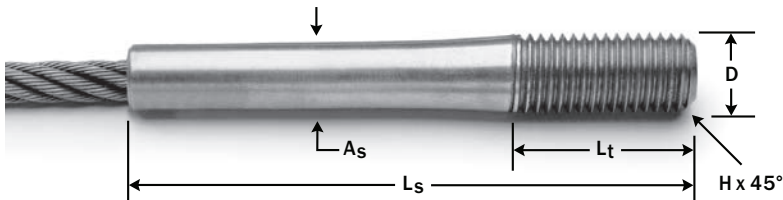

thread diameters are available, but that may reduce the assembly's rated capacity. Please check with our **Customer Service Department**.

EQUIVALENT TO SA156 SERIES

Dimensions for Threaded Stud SW-702

Dash No.	Rope Dia.	D	L_t	L_s	Approx. A_s
2	1/16	10	1/2	1 1/4	5/32
3	3/32	1/4	1/2	1 13/32	7/32
4	1/8	1/4	3/4	1 7/8	7/32
5	5/32	5/16	7/8	2 1/2	1/4
6	3/16	3/8	1	2 7/8	5/16
7	7/32	7/16	1	3	3/8
8	1/4	1/2	1 1/8	3 5/16	7/16
9	9/32	9/16	1 1/4	3 11/16	1/2
10	5/16	5/8	1 1/2	4 1/8	9/16
12	3/8	3/4	1 5/8	5 1/8	5/8
14	7/16	3/4	1 7/8	5 13/16	5/8
16	1/2	7/8	2 1/4	6 5/8	3/4
18	9/16	1	2 1/2	7 3/8	7/8
20	5/8	1 1/8	3	8 1/4	1
24	3/4	1 3/8	3 1/4	9 3/8	1 1/4
28	7/8	1 1/2	3 1/2	10 5/8	1 3/8
32	1	1 3/4	4 3/8	12 3/4	1 9/16
36	1 1/8	2	4 3/4	13 3/4	1 3/4
40	1 1/4	2 1/4	5 1/8	15 1/2	2
44	1 3/8	2 1/2	5 1/2	16 1/2	2 1/4

All dimensions are in inches.