




PRODUCT CATALOG

Threaded Sleeve SW-701

- ▶ Maximize the length adjustment of your assembly at the point where a wire rope is attached
- ▶ Equivalent to SA155 Series
- ▶ [View Dimensions Chart](#)

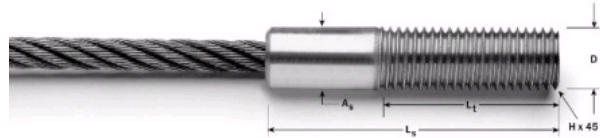

The sleeve is made to meet your requirements. The standard sleeve material is carbon steel, but stainless steels and higher strength steels are also available on request. We furnish the sleeves without wrench flats unless specified on the order. Please indicate dimensions across the flats, the number of sides, and the location on the fitting.

Please specify the L_s , L_t and D .

To determine the thread length (L_t), use the *minimum dimensions* needed. This allows us to use existing qualified designs. The standard thread used is Right Hand National Coarse Class 2A, but other threads are available on request.

You may order custom designs with different fitting lengths if you want, but that may reduce the assembly's rated capacity.

Dimensions for Threaded Sleeve SW-701

Dash No.	Rope Dia.	D	L_t	Approx. L_s	A_s
3	3/32	1/4	1/2	1	1/4
4	1/8	1/4	3/4	1 1/4	1/4
5	5/32	5/16	1	1 1/2	5/16
6	3/16	3/8	1 1/4	1 3/4	3/8
7	7/32	7/16	1 1/4	2	7/16
8	1/4	1/2	1 1/2	2 1/4	1/2
9	9/32	9/16	1 1/2	2 1/2	9/16
10	5/16	5/8	1 3/4	3	5/8
12	3/8	3/4	2	3 1/2	3/4
14	7/16	7/8	2 1/4	4	7/8
16	1/2	1	2 1/2	4 1/2	1
18	9/16	1 1/8	2 3/4	5	1 1/8
20	5/8	1 1/4	3	5 1/2	1 1/4
24	3/4	1 1/2	4	7	1 1/2
28	7/8	1 3/4	5	8	1 3/4
32	1	2	6	9	2

All dimensions are in inches.

RELATED INFORMATION

[View Tuf-Grip Assemblies Handbook](#)

MacWhyte, a WireCo WorldGroup brand, understands that results matter and we produce high quality wire rope and wire rope assemblies that perform to your exacting specifications. We employ the most experienced, talented, licensed engineers in the industry to design solutions for your most complex mechanical systems. Find out for yourself how MacWhyte wire ropes and custom assemblies prove themselves time and time again in the field. **MacWhyte: Results by Design.**

[» view searchable product catalog](#)