


# WIRELON

---

## Nylon coated can conveyor rope

MacWhyte is the industry leader for coated can conveyor wire rope. Since its inception in 1960, Wirelon has proven its superiority in major food canning and can manufacturing operations. MacWhyte is now the nation's largest producer of nylon coated can conveyor rope.

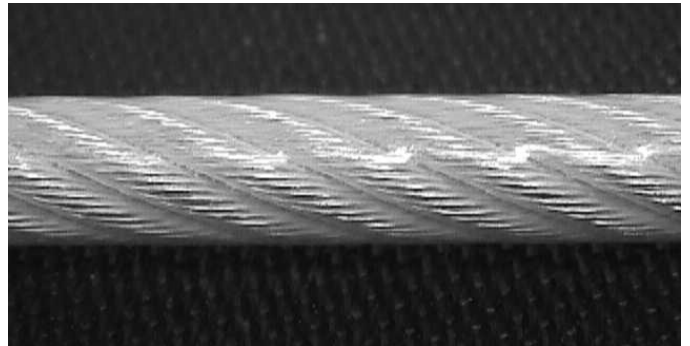

Wirelon with Nylon 11 Coating is recommended for continuous exposure to temperatures below 250° F. Wirelon

can be furnished in any standard size needed to fit a particular installation. Available on standard reels or in prespliced and recoated loops, it is designed to replace uncoated wire rope of the same nominal outside diameter with a minimum of preparation.

### Resists Corrosion

Nylon coating outside, plus galvanizing of individual wires inside, protect steel from corrosion.

### Improves Fatigue Life

Nylon coating imparts a greater fatigue life to the rope and gives additional security at tuck points.

### Eliminates Cable Burns

When cans stop, Wirelon glides without nicking or digging. Will not chip enamel or paint.

### Reduces Plant Noise

Working conditions improve when cans move smoothly on noiseless nylon.

### Reduces Maintenance


Nylon surface cushions contact with sheaves, prolongs groove life. Doesn't gather dirt or foreign matter.

### Extends Service Life


According to the largest users, Wirelon can conveyor rope is outlasting uncoated rope, four to one.

# Specifications


Class	Core Rope Dia. (In.)	Nominal Outside Dia. (In.)	Minimum Breaking Force	Approx. Wt./100 Ft.
7 x 7	3/64	1/16	270	.46
	1/16	3/32	480	1.0
	1/16	1/8	480	1.2
	3/32	1/8	920	1.9
	3/32	5/32	920	2.2
	3/32	3/16	920	2.7
7 x 19	1/8	3/16	2,000	3.6
	1/8	1/4	2,000	4.2
	3/16	1/4	4,200	7.9
	1/4	3/8	7,000	14.8
	*5/16	3/8	9,000	18.5
6 x 19	1/4	5/16	4,300	12.4
	*5/16	3/8	6,680	17.6



**7 x 7 Wirelon**



**7 x 19 Wirelon**



**6 x 19 Wirelon**

Recommended working load not to exceed 1/5 of minimum breaking force.

Acceptance strength is not less than 2 1/2% below the minimum breaking force listed.

*\*Stainless or Galvanized*

MacWhyte is very proud of its patented recoating procedure. It provides the customer with a low cost portable system that is time tested. Wirelon recoating kit available upon request for original installation or in case of a cable break.

816 270-4700  
info@wirecoworldgroup.com

12200 NW Ambassador Dr.  
Kansas City, MO 64163  
wirecoworldgroup.com



A WireCo® WorldGroup Brand