


TYPE 6 ANCHOR SOCKETS

Type 6 Anchor Sockets are used for structural strand and rope. They are provided with a rod and a semi-finished, heavy hex nut for tensioning cable assemblies and making final length adjustments.

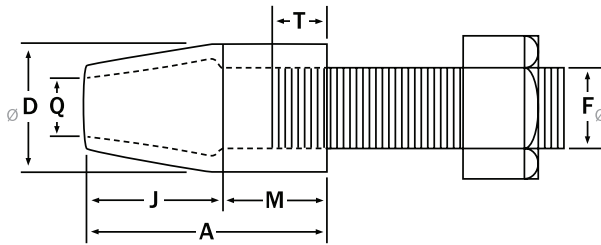

TOLERANCES

- Dimensions under 4": $\pm 1/16"$
- Dimensions over 4": $\pm 1/8"$
- Q (smaller sizes): $\pm 1/32"$

NOTE

Dimensions and tolerances shown are prior to galvanize.

Rope Diameter (in.)	Dimensions (in.)							Weight Each (lbs.)	Strand Diameter (in.)
	A	D	F	J	M	Q	T		
1/2	5 1/16	2 5/8	1	2 7/8	2 3/16	7/8	1 9/16	5	1/2
5/8	6	2 15/16	1 1/4	3 9/16	2 7/16	1	1 13/16	8	9/16-5/8
3/4	6 13/16	3 1/4	1 1/2	4 3/16	2 5/8	1 1/8	2	11	11/16-3/4
7/8 - 1	7 3/4	3 9/16	1 3/4	4 7/8	2 7/8	1 1/4	2 1/4	14	13/16-7/8
1 1/8	8 11/16	3 7/8	2	5 9/16	3 1/8	1 3/8	2 1/2	18	15/16-1
1 1/4	9 1/4	4 3/16	2 1/4	5 7/8	3 3/8	1 1/2	2 3/4	22	1 1/16-1 1/8
1 3/8	8 7/8	4 3/16	2 1/2	5 1/4	3 5/8	1 5/8	3	21	1 3/16-1 1/4
1 1/2	9 3/8	4 7/16	2 3/4	5 1/2	3 7/8	1 3/4	3 1/4	25	1 5/16-1 3/8
1 5/8	9 7/8	4 7/8	3	5 3/4	4 1/8	1 7/8	3 1/2	30	1 7/16-1 1/2
1 3/4	10 3/8	5 1/8	3 1/4	6	4 3/8	2	3 3/4	35	1 9/16-1 5/8
1 7/8 - 2	11	5 3/8	3 1/2	6 1/4	4 3/4	2 1/8	4	41	1 11/16-1 3/4
2 1/8	11 3/8	5 3/4	3 3/4	6 1/2	4 7/8	2 1/4	4 1/4	48	1 13/16-1 7/8
2 1/4	11 7/8	6	4	6 3/4	5 1/8	2 3/8	4 1/2	54	1 15/16-2
2 3/8	12 1/4	6 5/16	4	7	5 1/4	2 1/2	4 1/2	65	2 1/16-2 1/8
2 1/2	12 3/4	6 11/16	4 1/4	7 1/4	5 1/2	2 3/4	4 3/4	77	2 3/16-2 1/4
2 5/8	13 1/8	7 1/16	4 1/2	7 1/2	5 5/8	2 3/4	5	89	2 5/16-2 3/8
2 3/4 - 2 7/8	13 5/8	7 9/16	4 3/4	7 3/4	5 7/8	2 15/16	5 1/4	106	2 7/16-2 9/16
3	14 1/4	8 1/8	5	8 1/8	6 1/8	3 1/8	5 1/2	131	2 5/8-2 3/4
3 1/4	15 5/8	8 3/4	5 1/2	8 7/8	6 3/4	3 3/8	6	169	2 7/8-3
3 1/2	16 7/8	9 11/16	6	9 3/4	7 1/8	3 3/4	6 1/2	219	3 1/8-3 1/4
3 3/4	17 7/8	10 3/8	6 1/4	10 3/8	7 1/2	4	6 3/4	275	3 3/8-3 1/2
4	19 3/4	11 1/4	6 3/4	11 1/8	8 5/8	4 1/4	8	351	3 5/8-3 3/4
4 1/4	20 1/4	11 3/4	7 1/4	11 3/4	8 1/2	4 1/2	8	405	3 7/8-4
4 1/2 - 4 3/4	20 1/4	11 3/4	7 1/4	11 3/4	8 1/2	5 1/4	7 3/4	376	4 1/8-4 3/8
5 - 5 1/4	22	12 1/2	7 3/4	12 1/2	9 1/2	5 3/4	8 3/4	441	4 1/2-4 3/4
5 1/2 - 5 3/4	23 1/2	13 1/2	8	13 3/4	9 3/4	6 1/4	9	567	4 7/8-5 1/8
6	25	14	8 1/4	15	10	6 1/2	9 1/4	639	5 1/4-5 1/2